


For new installations and modernisation

LED-shaft lightings
easy connect LED120dif
easy connect LED120hf, non halogen



The **easy connect LED120**-shaft lightings are based on state-of-the-art technology.
 All components are in accordance with the European lift standard **EN 81-20** as well as with **CE-**, **REACH-** and **RoHS-**guidelines.
 All lighting strips are ready for immediate use incl. installation material.



easy connect LED120dif



- 120 high performance-LEDs per meter
- Milky jacket material to reduce dazzling
- 10 m-connection cable
- Shaped plug
- Connection box with rectifier
- Protection against highest stress peaks in the mains power supply
- Line fuse
- Spare fuse in the connection box
- Fixation dowels with cable ties

Item no.: **853**** (** height of shaft rounded up)



easy connect LED120hf




- 120 high performance-LEDs per meter
- Milky jacket material **non halogen** and **non silicone**
- 10 m-connection cable, **non halogen**
- Shaped plug
- Connection box with rectifier
- Protection against highest stress peaks in the mains power supply
- Line fuse
- Spare fuse in the connection box
- Fixation dowels with cable ties

Item no.: **893**** (** height of shaft rounded up)



| Technical data | |
|------------------------------------------------|------------------------------|
| Input voltage | 230 – 240 VAC |
| Angle of radiation | > 160 degree |
| Colour temperature of the light | approx. 5000 K |
| Service life (mttf) at $T_{en} = 25\text{ °C}$ | approx. 50,000 hours |
| Typical vertical illumination (1 m-distance) | > 300 lx |
| Maximum length | 75 m, cut-off length 1 meter |
| Operating temperature | -20 °C to +50 °C |
| Power consumption | < 8 W per meter |
| Dimension (width x height) | approx. 12 x 7 mm |
| Weight | < 100 g per meter |
| Safety class | IP65 (optional IP68) |
| Degree of protection | 2 |

Typical illumination diagram (all figures in [lx])

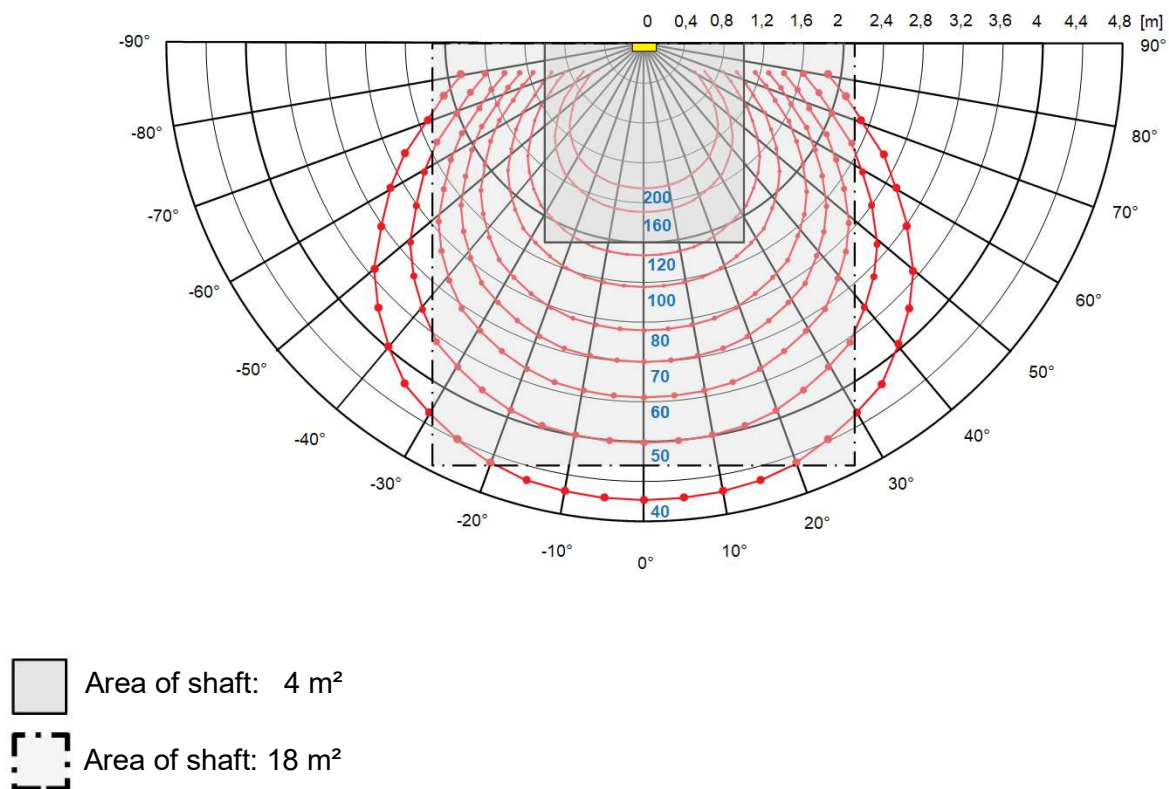

Switch GmbH keeps the right to alter the product with regard to technical improvement without further notice.
DS_ecLED120dif-hf_E25-A